


PROPRIETARY AND CONFIDENTIAL


REVISIONS

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED


REV.	ECN	DESCRIPTION	BY/DATE	CHK	APPR
A	5698	INITIAL RELEASE	01/26/09	ANS	DV
B	5351	UPDATED FORMAT	RA, 07/28/10	EP	DV
C	10439	ADDED SCHEMATIC, NOTES 3 & 4, CONFIGURATION CONTROL STAMP, AND ATEX MARKING	AB 10/02/13		

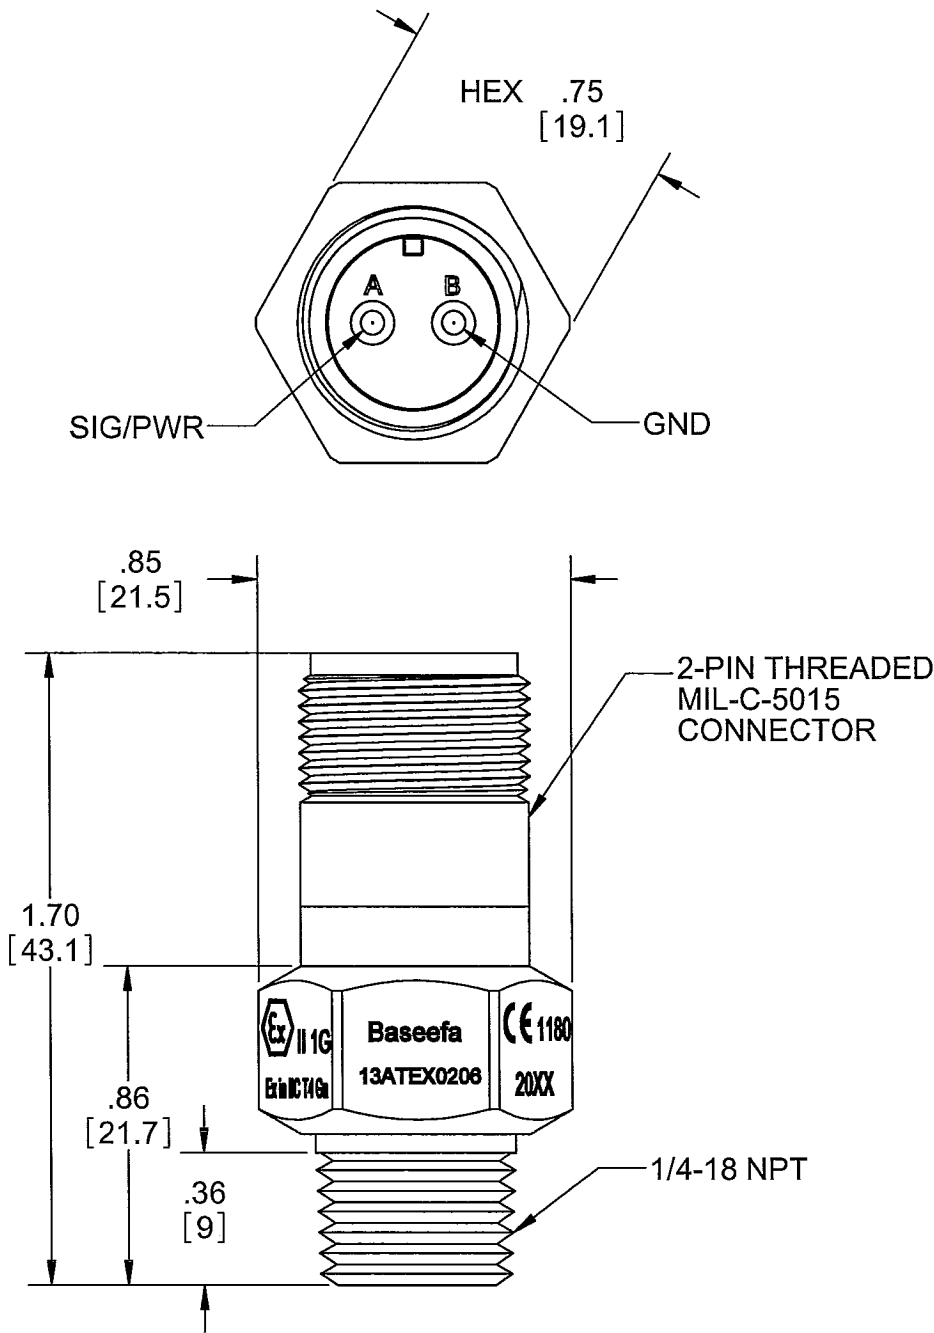

SENSING
DIAPHRAGM
Ø.31
[Ø 7.9]

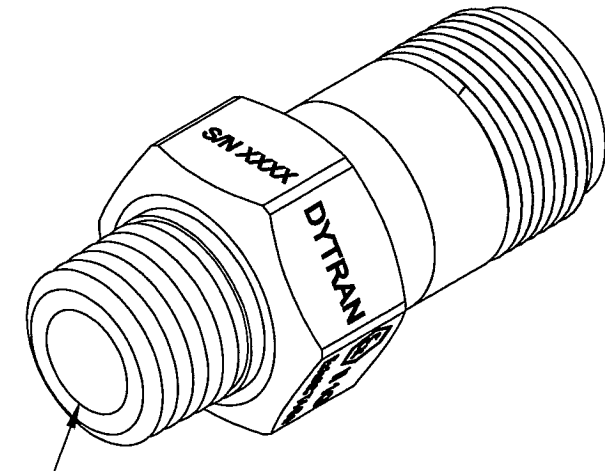

HOUSING

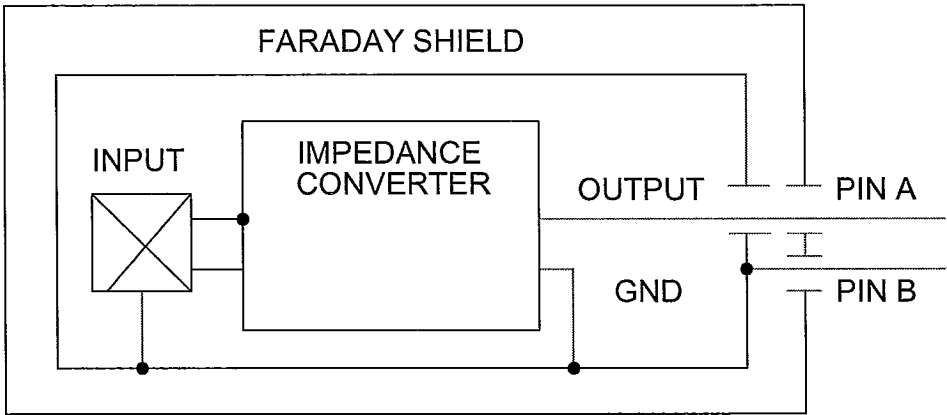

SCHEMATIC DIAGRAM

MODEL	SENSITIVITY
2006V1	10mV/PSI
2006V2	50mV/PSI
2006V3	100mV/PSI

NO CHANGES ALLOWED
WITHOUT CONSENT OF
CONFIGURATION CONTROL BOARD
DYTRAN INSTRUMENTS INC.

ENG *EP* QA *MS*

1. CASE TO GROUND PIN ISOLATION >100MΩ
2. MATERIAL: HOUSING/DIAPHRAGM - 316L
CONNECTOR - 304L
3. IMPEDANCE CONVERTER HAS NO VOLTAGE ENHANCING/GENERATING PARTS.
4. TOTAL SENSOR CAPACITANCE, Ci (PIEZO ELEMENT PLUS CIRCUIT CAPACITORS): 18 pF
MAXIMUM. SENSOR CONTAINS NO INDUCTIVE COMPONENTS.

NOTES: UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED:
INTERPRET DIM & TOL PER
ASME Y14.5M - 1994.
REMOVE BURRS.
COUNTERSINK INTERNAL THDS
90° TO MAJOR DIA.
CHAM EXT THDS 45° TO MINOR DIA.
THD LENGTHS AND DEPTHS ARE FOR
MIN FULL THDS.
DIMENSIONS APPLY AFTER FINISHING.

ALL MACHINED SURFACES.
TOTAL RUNOUT WITHIN .005.
BREAK SHARP EDGES .005 TO .010.
MACHINED FILLET RADII .005 TO .015.
WELDING SYMBOLS PER AWS A2.4.
ABBREVIATIONS PER MIL-STD-12.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES.
TOLERANCES ARE:

DECIMALS	ANGLES
.XX ±.01	±1°
.XXX ±.005	

APPROVALS		DATE
ORIG	DV	04/28/08
CHK	ANS	01/27/09
APP	DV	01/27/09

DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION
USA


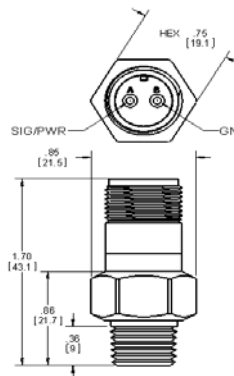
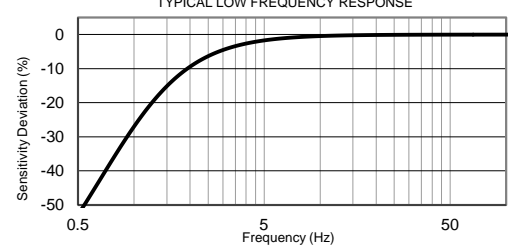
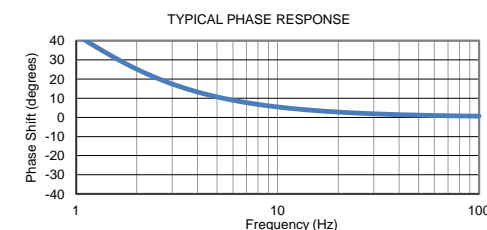

DYTRAN
INSTRUMENTS, INC. Chatsworth, CA

MASTER
ONLY IF IN RED

TITLE: **OUTLINE/INSTALLATION
DRAWING, 2006V**

SIZE	CAGE CODE	DWG NO	REV
B	2W033	127-2006V	C

SCALE: 2:1 SOLIDWORKS SHEET 1 OF 1

MODEL NUMBER 2006V2		PERFORMANCE SPECIFICATION				DOC NO. PS2006V2																																																																																									
		DYNAMIC PRESSURE SENSOR, IEPE				REV D , ECN 10606, 12/18/13																																																																																									
		<ul style="list-style-type: none">• HIGH SENSITIVITY• ACCELERATION COMPENSATION• ELECTRICALLY ISOLATED HOUSING																																																																																													
		<p>This family also includes:</p> <table><tr><th>Model</th><th>Sensitivity (mV/psi)</th><th>Range (psi pk)</th><th>Resolution (Grms)</th><th>Oper. Temp(°F)</th><th>TC (Sec)</th></tr><tr><td>2006V1</td><td>10</td><td>500</td><td>0.007</td><td>-40 to +250</td><td>0.17 to 0.5</td></tr><tr><td>2006V3</td><td>100</td><td>50</td><td>0.0007</td><td>-40 to +250</td><td>0.17 to 0.5</td></tr></table>						Model	Sensitivity (mV/psi)	Range (psi pk)	Resolution (Grms)	Oper. Temp(°F)	TC (Sec)	2006V1	10	500	0.007	-40 to +250	0.17 to 0.5	2006V3	100	50	0.0007	-40 to +250	0.17 to 0.5																																																																						
Model	Sensitivity (mV/psi)	Range (psi pk)	Resolution (Grms)	Oper. Temp(°F)	TC (Sec)																																																																																										
2006V1	10	500	0.007	-40 to +250	0.17 to 0.5																																																																																										
2006V3	100	50	0.0007	-40 to +250	0.17 to 0.5																																																																																										
		Please, refer to the performance specifications of the products in this family for detailed description.																																																																																													
		<p>Notes:</p> <p>[1] Percent full scale, zero based fit straight line method.</p> <p>[2] From constant current type power unit only. This sensor MUST NOT BE CONNECTED to a DC power source without current limiting, 20mA Maximum.</p> <p>[3] A calibration certificate traceable to NIST is supplied with each instrument.</p> <p>[4] In the interest of constant product improvement, we reserve the right to change the specification without notice</p>																																																																																													
		<p>CERTIFICATIONS:</p> <p>ATEX Ex II 1G Ex ia IIC T4 Ga (marked on each microphone)</p> <p>Baseefa13ATEX0206(marked on each microphone)</p> <p>CE certified (marked on each microphone)</p>																																																																																													
<p>PHYSICAL</p> <p>Weight, Max</p> <p>Mounting Provision</p> <p>Connector</p> <p>Diaphragm Material</p>		<table><tr><th>ENGLISH</th><th></th><th>SI</th></tr><tr><td>1.9</td><td>oz</td><td>55</td></tr><tr><td>1/4-18 MNPT</td><td></td><td>1/4-18 MNPT</td></tr><tr><td>MIL-C-5012, 2 PIN</td><td>Type</td><td>MIL-C-5012, 2 PIN</td></tr><tr><td>316L</td><td>Material</td><td>316L</td></tr></table>		ENGLISH		SI	1.9	oz	55	1/4-18 MNPT		1/4-18 MNPT	MIL-C-5012, 2 PIN	Type	MIL-C-5012, 2 PIN	316L	Material	316L	<table><tr><th>SI</th><th></th><th>ENGLISH</th></tr><tr><td>55</td><td>grams</td><td></td></tr><tr><td>1/4-18 MNPT</td><td></td><td></td></tr><tr><td>MIL-C-5012, 2 PIN</td><td></td><td></td></tr><tr><td>316L</td><td></td><td></td></tr></table>				SI		ENGLISH	55	grams		1/4-18 MNPT			MIL-C-5012, 2 PIN			316L																																																												
ENGLISH		SI																																																																																													
1.9	oz	55																																																																																													
1/4-18 MNPT		1/4-18 MNPT																																																																																													
MIL-C-5012, 2 PIN	Type	MIL-C-5012, 2 PIN																																																																																													
316L	Material	316L																																																																																													
SI		ENGLISH																																																																																													
55	grams																																																																																														
1/4-18 MNPT																																																																																															
MIL-C-5012, 2 PIN																																																																																															
316L																																																																																															
<p>PERFORMANCE</p> <p>Sensitivity +/- 10%</p> <p>Range F.S for +/- 5 volts peak out</p> <p>Maximum Pressure</p> <p>Equivalent Electrical Noise (Resolution)</p> <p>Mounted Resonant Frequency</p> <p>Frequency Response, +/- 10%</p> <p>Minimum Rise Time of Input Pulse</p> <p>Discharge Time Constant</p> <p>Linearity [1]</p> <p>Lower -3db Frequency</p> <p>Acceleration Sensitivity, Axial Direction</p>		<table><tr><td>50</td><td>mV/psi</td><td>7.2 X 10³</td><td>mV/Pa</td></tr><tr><td>+/-100</td><td>psi</td><td>689476</td><td>Pa</td></tr><tr><td>8000</td><td>psi</td><td>5.5 X 10⁴</td><td>Pa</td></tr><tr><td>0.0014</td><td>psi</td><td>9.65</td><td>Pa</td></tr><tr><td>>50000</td><td>Hz</td><td>>50000</td><td>Hz</td></tr><tr><td>2 to 5000</td><td>Hz</td><td>2 to 5000</td><td>Hz</td></tr><tr><td>2</td><td>µsec</td><td>2</td><td>µsec</td></tr><tr><td>0.17 to 0.5</td><td>sec</td><td>0.17 to 0.5</td><td>sec</td></tr><tr><td>+/-1</td><td>Hz</td><td>+/-1</td><td>%F.S</td></tr><tr><td>1</td><td>Hz</td><td>1</td><td>Hz</td></tr><tr><td>0.002</td><td>psi/g</td><td>0.014</td><td>Kpa/g</td></tr></table>		50	mV/psi	7.2 X 10 ³	mV/Pa	+/-100	psi	689476	Pa	8000	psi	5.5 X 10 ⁴	Pa	0.0014	psi	9.65	Pa	>50000	Hz	>50000	Hz	2 to 5000	Hz	2 to 5000	Hz	2	µsec	2	µsec	0.17 to 0.5	sec	0.17 to 0.5	sec	+/-1	Hz	+/-1	%F.S	1	Hz	1	Hz	0.002	psi/g	0.014	Kpa/g	<table><tr><td>7.2 X 10³</td><td>mV/Pa</td><td></td><td></td></tr><tr><td>689476</td><td>Pa</td><td></td><td></td></tr><tr><td>5.5 X 10⁴</td><td>Pa</td><td></td><td></td></tr><tr><td>9.65</td><td>Pa</td><td></td><td></td></tr><tr><td>>50000</td><td>Hz</td><td></td><td></td></tr><tr><td>2 to 5000</td><td>Hz</td><td></td><td></td></tr><tr><td>2</td><td>µsec</td><td></td><td></td></tr><tr><td>0.17 to 0.5</td><td>sec</td><td></td><td></td></tr><tr><td>+/-1</td><td>%F.S</td><td></td><td></td></tr><tr><td>1</td><td>Hz</td><td></td><td></td></tr><tr><td>0.014</td><td>Kpa/g</td><td></td><td></td></tr></table>				7.2 X 10 ³	mV/Pa			689476	Pa			5.5 X 10 ⁴	Pa			9.65	Pa			>50000	Hz			2 to 5000	Hz			2	µsec			0.17 to 0.5	sec			+/-1	%F.S			1	Hz			0.014	Kpa/g		
50	mV/psi	7.2 X 10 ³	mV/Pa																																																																																												
+/-100	psi	689476	Pa																																																																																												
8000	psi	5.5 X 10 ⁴	Pa																																																																																												
0.0014	psi	9.65	Pa																																																																																												
>50000	Hz	>50000	Hz																																																																																												
2 to 5000	Hz	2 to 5000	Hz																																																																																												
2	µsec	2	µsec																																																																																												
0.17 to 0.5	sec	0.17 to 0.5	sec																																																																																												
+/-1	Hz	+/-1	%F.S																																																																																												
1	Hz	1	Hz																																																																																												
0.002	psi/g	0.014	Kpa/g																																																																																												
7.2 X 10 ³	mV/Pa																																																																																														
689476	Pa																																																																																														
5.5 X 10 ⁴	Pa																																																																																														
9.65	Pa																																																																																														
>50000	Hz																																																																																														
2 to 5000	Hz																																																																																														
2	µsec																																																																																														
0.17 to 0.5	sec																																																																																														
+/-1	%F.S																																																																																														
1	Hz																																																																																														
0.014	Kpa/g																																																																																														
<p>ENVIRONMENTAL</p> <p>Maximum Vibration</p> <p>Maximum Shock</p> <p>Temperature Range</p> <p>Thermal Coefficient Of Sensitivity</p> <p>Environmental Seal</p> <p>Power/Sig Ground Isolation, Min</p>		<table><tr><td>3000</td><td>g rms</td><td>3000</td><td>g rms</td></tr><tr><td>10000</td><td>g pk</td><td>10000</td><td>g pk</td></tr><tr><td>-40 to +250</td><td>°F</td><td>-40 to +121</td><td>°C</td></tr><tr><td>0.03</td><td>% / °F</td><td>0.02</td><td>% / °C</td></tr><tr><td>Hermetic</td><td></td><td>Hermetic</td><td></td></tr><tr><td>100</td><td>MΩ</td><td>100</td><td>MΩ</td></tr></table>		3000	g rms	3000	g rms	10000	g pk	10000	g pk	-40 to +250	°F	-40 to +121	°C	0.03	% / °F	0.02	% / °C	Hermetic		Hermetic		100	MΩ	100	MΩ	<table><tr><td>3000</td><td>g rms</td><td></td><td></td></tr><tr><td>10000</td><td>g pk</td><td></td><td></td></tr><tr><td>-40 to +250</td><td>°C</td><td></td><td></td></tr><tr><td>0.02</td><td>% / °C</td><td></td><td></td></tr><tr><td>Hermetic</td><td></td><td></td><td></td></tr><tr><td>100</td><td>MΩ</td><td></td><td></td></tr></table>				3000	g rms			10000	g pk			-40 to +250	°C			0.02	% / °C			Hermetic				100	MΩ																																										
3000	g rms	3000	g rms																																																																																												
10000	g pk	10000	g pk																																																																																												
-40 to +250	°F	-40 to +121	°C																																																																																												
0.03	% / °F	0.02	% / °C																																																																																												
Hermetic		Hermetic																																																																																													
100	MΩ	100	MΩ																																																																																												
3000	g rms																																																																																														
10000	g pk																																																																																														
-40 to +250	°C																																																																																														
0.02	% / °C																																																																																														
Hermetic																																																																																															
100	MΩ																																																																																														
<p>ELECTRICAL</p> <p>Excitation Voltage Range</p> <p>Excitation Current Range [2]</p> <p>Output Impedance NOM</p> <p>Output Bias Voltage, NOM.</p> <p>Output Signal Polarity</p>		<table><tr><td>18 to 30</td><td>VDC</td><td>18 to 30</td><td>VDC</td></tr><tr><td>2 to 20</td><td>mA</td><td>2 to 20</td><td>mA</td></tr><tr><td>100</td><td>Ω</td><td>100</td><td>Ω</td></tr><tr><td>7.5 to 9.5</td><td>VDC</td><td>7.5 to 9.5</td><td>VDC</td></tr><tr><td>Positive</td><td></td><td>Positive</td><td></td></tr></table>		18 to 30	VDC	18 to 30	VDC	2 to 20	mA	2 to 20	mA	100	Ω	100	Ω	7.5 to 9.5	VDC	7.5 to 9.5	VDC	Positive		Positive		<table><tr><td>18 to 30</td><td>VDC</td><td></td><td></td></tr><tr><td>2 to 20</td><td>mA</td><td></td><td></td></tr><tr><td>100</td><td>Ω</td><td></td><td></td></tr><tr><td>7.5 to 9.5</td><td>VDC</td><td></td><td></td></tr><tr><td>Positive</td><td></td><td></td><td></td></tr></table>				18 to 30	VDC			2 to 20	mA			100	Ω			7.5 to 9.5	VDC			Positive																																																			
18 to 30	VDC	18 to 30	VDC																																																																																												
2 to 20	mA	2 to 20	mA																																																																																												
100	Ω	100	Ω																																																																																												
7.5 to 9.5	VDC	7.5 to 9.5	VDC																																																																																												
Positive		Positive																																																																																													
18 to 30	VDC																																																																																														
2 to 20	mA																																																																																														
100	Ω																																																																																														
7.5 to 9.5	VDC																																																																																														
Positive																																																																																															
				<p>TYPICAL LOW FREQUENCY RESPONSE</p>  <p>TYPICAL PHASE RESPONSE</p> 																																																																																											
		Units on the line drawing are in inches, units in brackets are in millimeters. Refer to 127-2006V for more information.																																																																																													
		21592 Marilla Street, Chatsworth, California 91311 Phone: 818.700.7818 Fax:818.700.7880 www.dytran.com For permission to reprint this content, please contact info@dytran.com																																																																																													